

HPA Series Heated Mixing Machine



➔ Glass-Door-Free Design

Convenient as Mixing Machine

➔ Flexible

SANTINT · CHINA

Address: Xushui Industrial Trade Park, Zhengzhou.
Tel: +86 371 6785 7168

SANTINT · POLAND

Address: ul. Postepu 19. mag.5
02-676 Warszawa Polska
Email: info@santint.com

SANTINT · U.S.A


Address: 2000 Bloomingdale Road, Suite 220, Glendale Heights, IL 60139
Tel: +1 847 350 6911

SANTINT · AUSTRALIA

Address: 2/4 Weddel Court
Laverton North Victoria
Email: info@santint.com

HPA Series FEATURES >>>

• The sealing plate would be opened by the paint can during operation to make the warm air inside the sealing cover. The sealing plate would be closed automatically if the paint can is removed.

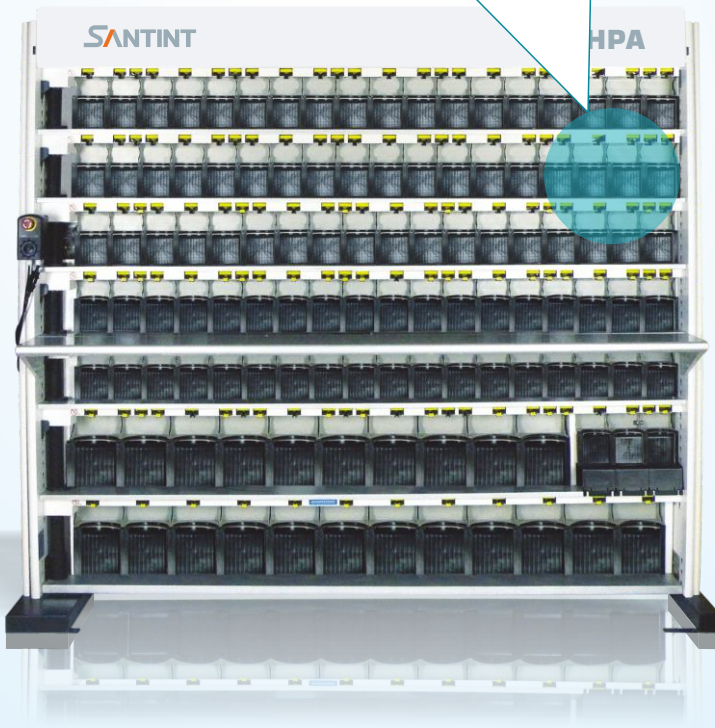

1 Innovative Design
Glass Door Removed,
Convenient for Operation



2 Easy to Install

3 Automatic Temperature Control



4 Thermal & Mixing in One Machine

5 Flexible
Configurable Layer
Height/Width/Number
of Cans



- Heater PTC Air Heater
- Heating Mode Aluminum Fin Blowing
- Temperature Control Start heating when temperature lower than 16°C and stop when higher than 25°C

- Power Supply 220V
- Power 200W-800W
- Mixing Time 0-15 Mins/Time
- Mixing Speed 72 rpm

- | | | | |
|---------|-------------------|---------|-------------------|
| ■ Model | Dimension (W×D×H) | ■ Model | Dimension (W×D×H) |
| PA4 | 1000×630×2077 mm | PA10 | 2080×630×2077 mm |
| PA6 | 1360×630×2077 mm | PA12 | 2440×630×2077 mm |
| PA8 | 1720×630×2077 mm | | |

HPA Series
Technical
Parameters

