

V100

Vortex Mixer



- ➡ Compact and Cost-effective
- ➡ Easy Clamping

SANTINT • CHINA

Add: Feilong Road, Xingyang,
Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG
Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: ul. Postepu 19. mag.5
02-676 Warszawa Polska
Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 220, Glendale Heights,
IL 60139, U.S.A
Email: info@santintusa.com

SANTINT • INDIA


Add: Building No.E3, 2/3, Hari
Hari Compound, Near Gajanan
Petrol Pump, Mankoli Nana,
Bhiwandi 421302 Thane India
Email: nick@santint.com

SANTINT • SOUTH AFRICA

Address: Hatfield Plaza, 1122
Burnett Street, Pretoria,
Gauteng, South Africa 0025
Email: edwin.jiang@santint.com


V100 FEATURES >>>

SANTINT
WHERE INNOVATION MEETS PRECISION

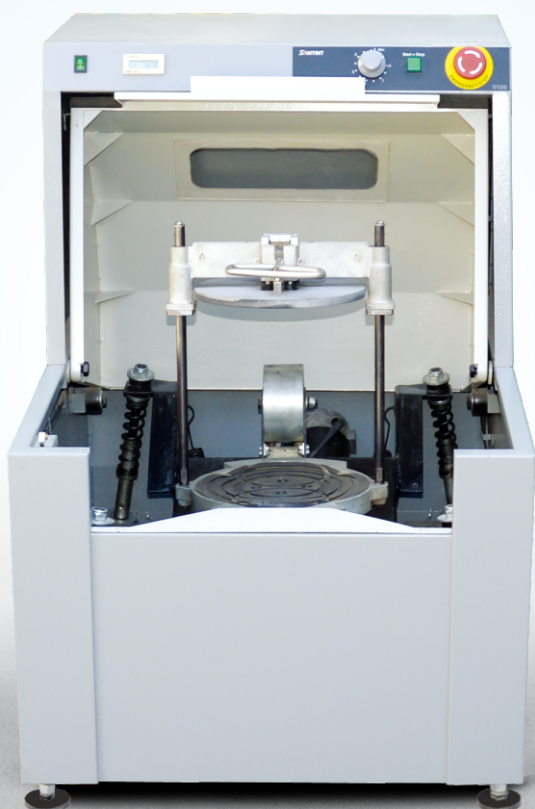

1 Easy Clamping

Press and push to clamp.




2 Vortex Rotation

Rotation with 30° dip angle, ensured mixing performance.

3 Auto Return


The can returns back to the original position after mixing, convenient to unload the can.



4 Safety Door Lock (Optional)

A safety door lock stop the door from being accidentally opened until the mixing cycle finishes for safe operation.

5 LCD Counter



■ Mixing Mode Vortex

■ Mixing Time 0-5min

■ Max Mixing Weight 10Kg

■ Mixing Speed 225rpm

■ Mixing Range Can size 0.15-5L Diameter 30-200mm Height 45-260mm

■ Machine Dimension(W X D X H) 550×715×780mm

■ Packing Dimension(W X D X H) 600×765×900mm

54Pieces/20"Container

■ Net Weight 90Kg

■ Gross Weight 110Kg

■ Power Supply 220V/110V 50Hz/60Hz

■ Power 250W

V100

Technical Parameters

